


Slide the back plate along the length of the Ava body. AWAY FROM the direction of the LED Driver Bracket. Do not slide in the other direction, as this will cause interference with the LED wires.

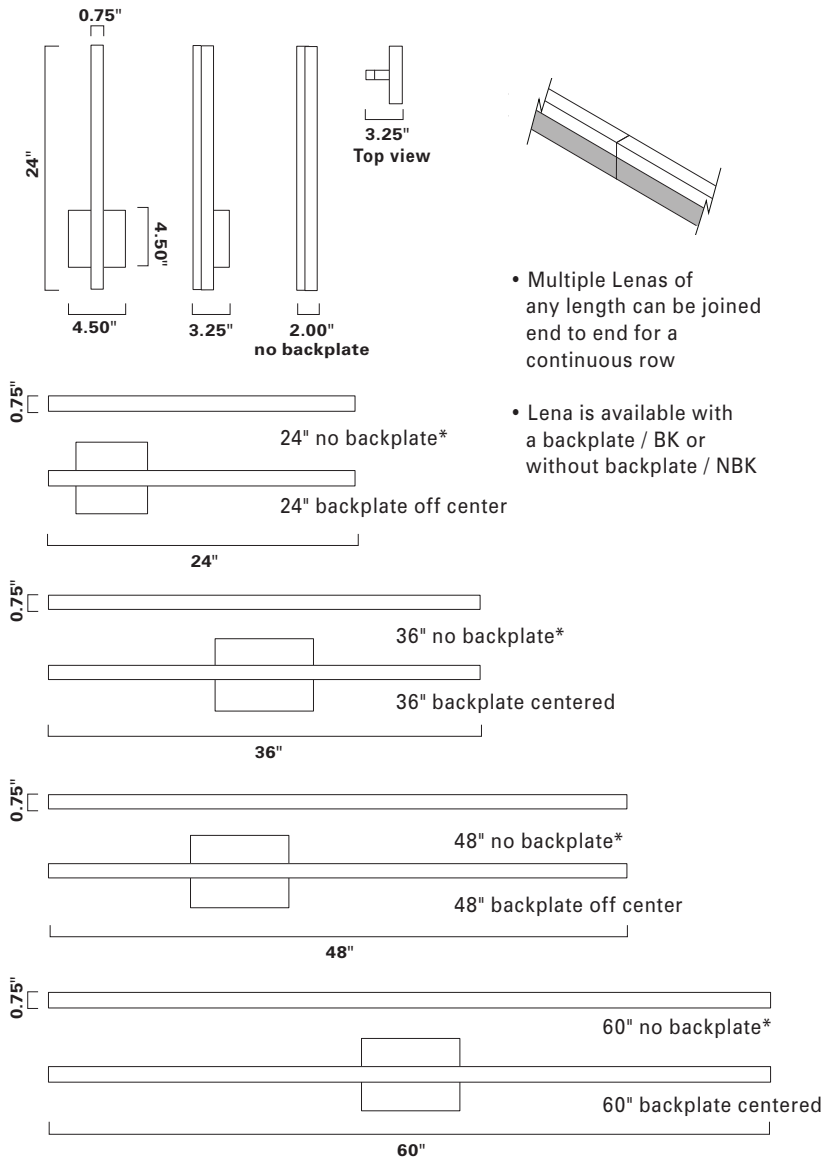

- Multiple Lenas of any length can be joined end to end for a continuous row
- Lena is available with a backplate / BK or without backplate / NBK

***When product is ordered with no backplate, driver is installed into wall**

LED ADA
UL/ETL Listed

Product Name / Model / Dimensions			Mounting Options	Acrylic	Finish Options	Lamping Options		
LEN - Lena Sconce			Standard Wall Mount / WM	Standard Matte Opal Acrylic / MA	Standard Brushed Aluminum / BA Gloss White / GW	Standard LED / LED		
SKU	Height	Projection*				SKU	Wattage	Integrated LED
LEN24	24"	3.25"				LEN24*	16	1170 lumens, 3000K, 85 CRI, 0-10VDC dimming
LEN36	36"	3.25"				LEN36*	25	1900 lumens, 3000K, 85 CRI, 0-10VDC dimming
LEN48	48"	3.25"				LEN48*	34	2560 lumens, 3000K, 85 CRI, 0-10VDC dimming
LEN60	60"	3.25"	LEN60*	41	3180 lumens, 3000K, 85 CRI, 0-10VDC dimming			
* Product projection with backplate / BK Product width .75" no backplate / NBK Product width with backplate 4.50" Backplate 24" 4.50" H x 4.50" W Backplate 36", 48" and 60", 7.00" H x 4.50" W						* universal driver accommodates both 120 - 277v		