


Phase

Sconces



50 Greene St
New York NY 10013
T +1 212 388 1621
sales@rbw.com



For 2D & 3D drawings of all products, including CAD, Revit and IES files, please visit rbw.com

Generate Date: Thu Jan 06 2022

DESCRIPTION

Phase recalls a quarter of the lunar cycle, Earth's moon half lit. Half of this wall-mounted, cast-glass spherical sconce emits a bright light, while the other half is coated in a chrome finish for reduced output.

MATERIALS

Cast glass, anodized aluminum

PERFORMANCE

Estimate 640 lm

Power Consumption 8.5W

Luminaire Watts 8.5W

90 CRI

LED LIFESPAN

50k hours

PATENT FILE NUMBER

Patent Number D868,340

CERTIFICATION

ADA Compliant

UL Listed

Suitable for Wet Locations

Suitable for Damp Locations

IP20

IP65

**PRODUCT DIMENSIONS**

6 dia x 4 in Depth

PRODUCT WEIGHT

2.5 lbs / 1.14 kg

DIMENSIONAL WEIGHT

4 lbs

YOUR PRODUCT CODE

RGP- - - - - - -

Specification Logic

GLASS FINISH

Half Chrome

1

BACKPLATE FINISH

Black Anodized

AA04

COLOR TEMPERATURE

2200K (candle light)

22

2700K (warm white)

27

3000K (soft white)

30

3500K (neutral white)

35



INPUT / CONTROL / POWER

110-120V Input TRIAC Control 10% Dimming	120_TR_LINE
110-120V Input TRIAC / ELV / 0-10V, 1% Dimming	120_TM_DEX
220-240V Input 0-10V, 1% Dimming	220_10_DEX
220-240V Input ELV Reverse Phase, 1% Dimming	220_ELV_DEX
220-240V Input TRIAC / Forward Phase, 1% Dimming	220_TR_DEX
110-277V Input 0-10V, 0.1% Dimming	277_10_DEX
110-277V Input DALI, 0.1% Dimming	277_DL_DEX

IP RATING

IP20 Rated	IP20
IP65 Rated	IP65

Drawings

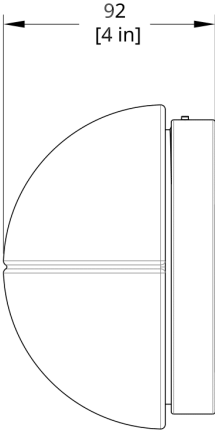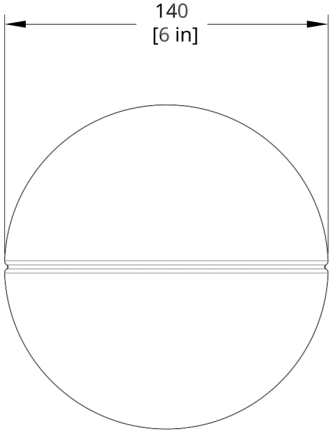

RGP Phase Sconce Dimension