


Ledge Round

Sconces



50 Greene St
New York NY 10013
T +1 212 388 1621
sales@rbw.com



For 2D & 3D drawings of all products, including CAD, Revit and IES files, please visit rbw.com

Generate Date: Tue Jan 04 2022

DESCRIPTION

LEDge's beauty lies in the economy of its form. Ledge's clean-cut design, drawn up as an intersection between two geometric planes, fits nicely into a range of settings. Its flexibility extends further in options of upward or downward installation and an array of surface finishes.

MATERIALS

Cast aluminum LED housing, molded PCB lens

COLLECTION NOTES

Ledge is suitable for wet locations when installed with diffuser facing down.

PERFORMANCE

390 lm

Power Consumption 8.8W

Luminaire Watts 8.8W

44.4 lm/W

90 CRI

LED LIFESPAN

50k hours

CERTIFICATION

ADA Compliant

UL Listed

Suitable for Wet Locations

IP44

**PRODUCT DIMENSIONS**

5 Dia. x 3 in Depth

PRODUCT WEIGHT

2.5 lbs / 1.14 kg

DIMENSIONAL WEIGHT

3 lbs

YOUR PRODUCT CODE

LD-R- [] - [] - [] - [] - []

Specification Logic

PRIMARY FINISH

Matte White Fine Texture	PC20
Matte Black	PC30
Custom Powder Coat	PCXX


COLOR TEMPERATURE

2700K (warm white)	27
3000K (soft white)	30

INPUT / CONTROL / POWER

110-120V Input TRIAC 10% Dimming	120_TR_LINE
----------------------------------	-------------

Drawings

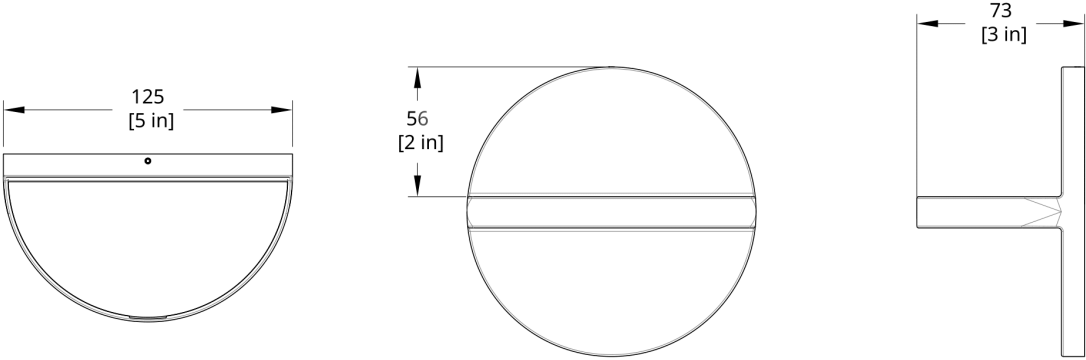

LD-R Ledge Sconce Dimension